


Why choose KernowJet FloorShark™?

KernowJet FloorShark™ is a unique floor graphics solution for indoor applications. It's perfect for retail stores, supermarkets & shopping centres, airports, travel hubs, convention centres, ideal for all smooth hard floors from concrete to tiling, also including low pile carpets tiles.

Its unique sharkskin coating absorbs the inks and dries to a hard slip-resistant surface. The coating offers a high R10-certified slip resistance, Bfl-s1 and EN 13501 fire ratings and eliminates the need to laminate. The floor graphics film is PVC-free and strongly tear-resistant, it will withstand everything from pallet trucks to stiletto heels.

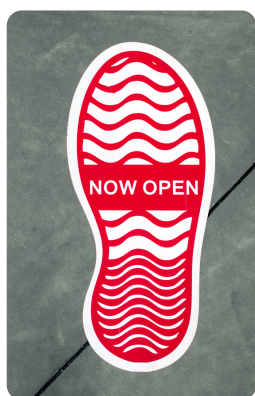

Key Features

- Ultra-tough floor graphic, suitable for smooth indoor floors including short-pile carpets
- Unique sharkskin coating absorbs the ink & dries tough, no need to laminate
- Easy to apply & easy to remove, does not tear into small pieces when removing
- No shrinkage - no risk of a rim of dirty adhesive forming around the print
- Bfl-s1 and EN 13501 fire ratings
- 100% PVC free



UK, EU & RoW Product List

PRODUCT DESCRIPTION	WIDTH	LENGTH	PRODUCT CODE
265µ KernowJet FloorShark™ (PET)	1524mm	25m	170TFG

US Product List

PRODUCT DESCRIPTION	WIDTH	LENGTH	PRODUCT CODE
10.4mil KernowJet FloorShark™ (PET)	54"	60"* 82'	170TFG



KERNOW
COATINGS

KERNOWJET FLOORSHARK™



KernowJet FloorShark™ (PET)

Applications

- Anti-slip signage & pathways
- Directional or branded floor graphics
- Branded or decorative floorstickers for retail
- Durable printed mats for high-traffic areas
- Floor labels in warehouses or factories
- Logos or designs integrated directly into high-traffic floors

Compatibility

Latex	★ ★ ★
(Eco) Solvent	★ ★ ★
UV	★ ★ ★
Certified	Certified for HP Latex Inks

Property	Typical Value	Units
	170TFG	
Total Thickness	265 +/- 6 10.4 +/- 0.2	μ/mil
Total Weight	338 +/- 8	gsm
Face Film Thickness (no adhesive)	170 +/- 4 6.7 +/- 0.2	μ/mil
Face Film Weight (no adhesive)	224 +/- 5	gsm
Adhesive thickness	35 +/- 5 1.4 +/- 0.2	μ/mil
180° Peel Adhesion (SS)	11 +/- 1	SS gF
Adhesive Service Temperature	-40 to +180 -40 to +365	°C/ °F
Liner Thickness	60 +/- 3 2.4 +/- 0.12	μ/mil
Liner Weight	83 +/- 2	gsm



Recommended conditions:

Printroom	10°C – 30°C (59°F – 86°F)	30% – 65% RH
Storage	10°C – 20°C (50°F – 68°F)	20% – 50% RH

Please return unused product to its original packaging.
Shelf Life: 24 months after delivery (under recommended storage conditions).

The information provided herein is correct to the best of our knowledge. No liability for any errors, facts or opinions is accepted.
We recommend users make their own assessments to satisfy themselves as to the suitability of this product for their application.
Regional certification differences apply.

Version 1, Copyright Sensitizers Group 2025